


FOOTPATH SURFACE SHOULD BE REMOVED TO A MINIMUM OF 300mm BEYOND EACH SIDE OF THE TRENCH EXCAVATION IF RUNNING PERPENDICULAR.

FOOTPATH SURFACE TO BE RESTORED TO ITS ORIGINAL SURFACE AND STATE, WITH BEDDING SAND, AS PER SD-03 OR SD-04, WHICHEVER RELEVANT TO THE SITE.

IN CIRCUMSTANCES WHERE THE TRENCH RUNS PARALLEL TO A CONCRETE FOOTPATH, THE ENTIRE FOOTPATH MUST BE REMOVED FOR THE FULL LENGTH OF THE TRENCH.

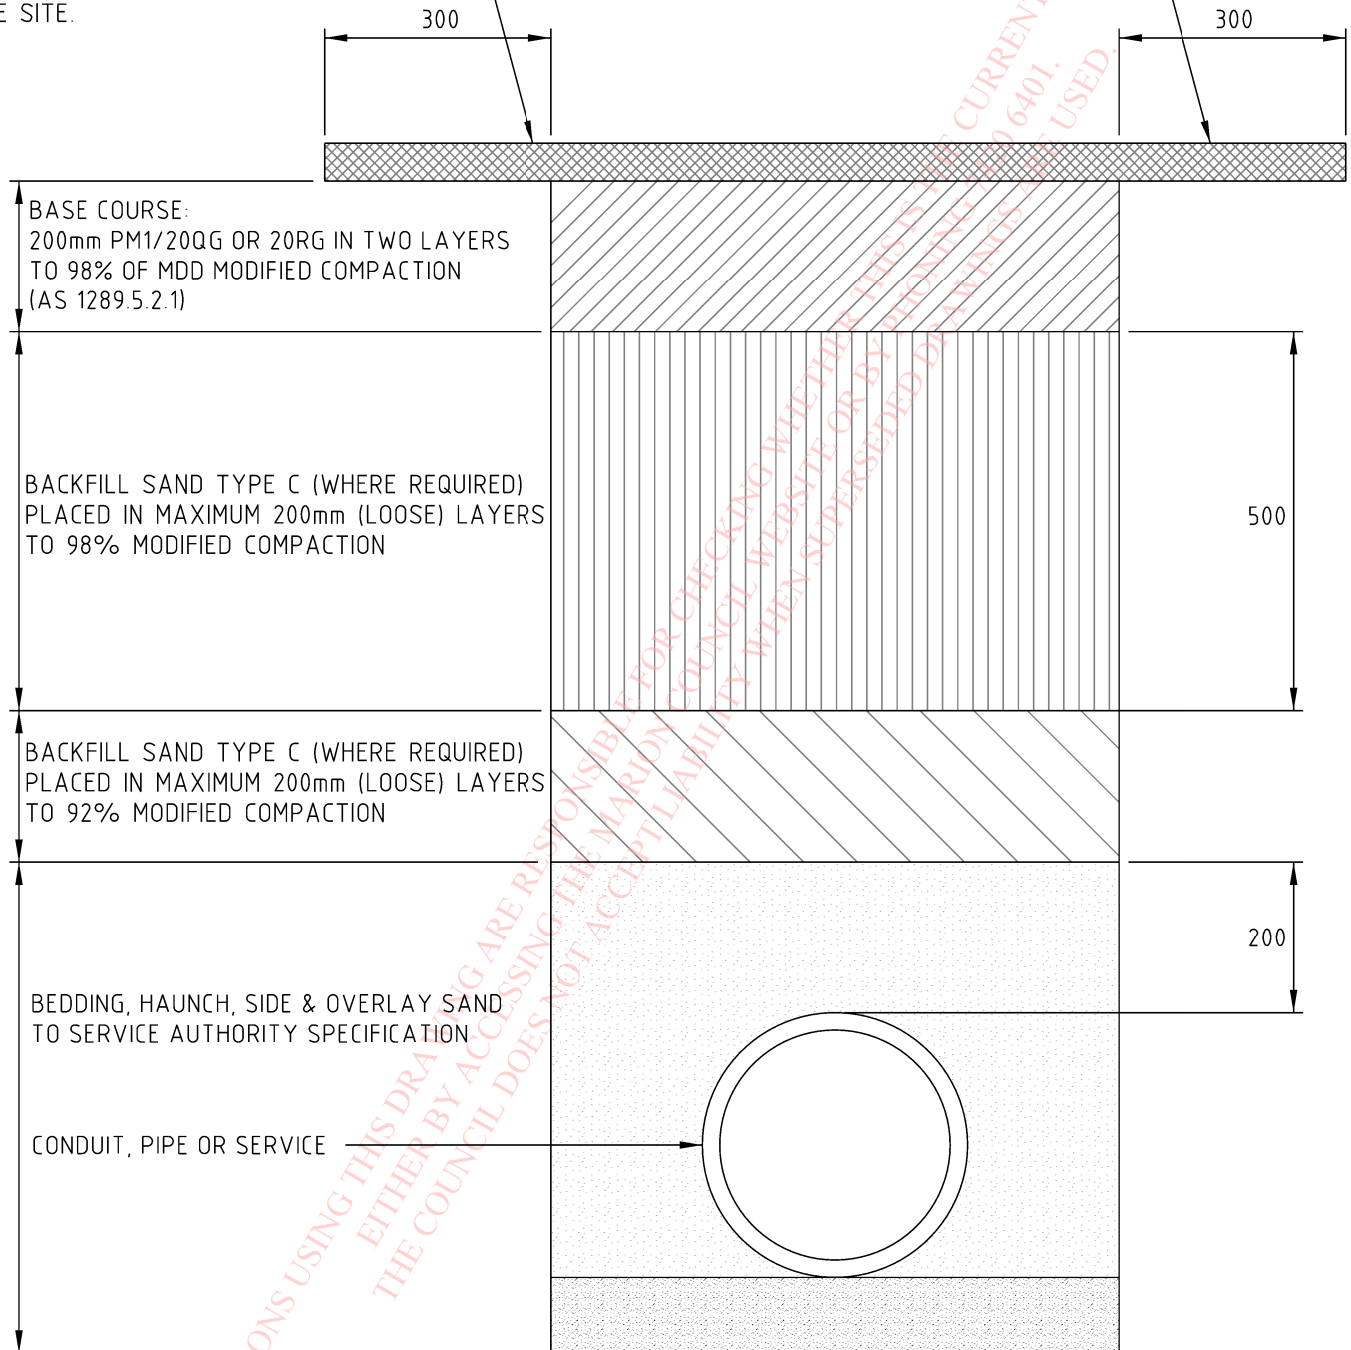

Not to Scale

ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.

# THE CORPORATION OF THE CITY OF MARION

## FOOTPATH RESTORATION BY OTHERS - COUNCIL REQUIREMENTS



Drawn : **A.M.D**

Date : **10 June 2008**

Approved :

Last Revised : **2 December 2021**

Ref. No. : **SD-21**